


TEMPO

Use: **events / trade fairs / congresses / shop layout, restaurants**
Indoor / Outdoor use



Fibres height: ± 35 mm
Total height: ± 37 mm

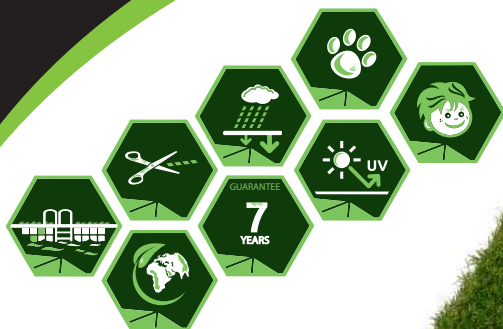

CLOSE TO REALITY
SOFTNESS
TRAMPLING RESISTANCE

CHARACTERISTICS

Fibres composition: **PE / PP mix**

Fibres weight: **925 g / m² $\pm$ 10%**

Total weight: **1585 g / m² $\pm$ 10%**

Straight fibres 

Curly fibres 

Gauge: **5/16"**

Stitches number/ 10 cm: **15 $\pm$ 1**

Loops number: **18900 / m² $\pm$ 10%**

Primary backing: **PP 90 g / m²**

Secondary backing: **black latex (SBR) 570 g / m²**

REFERENCES

2 x 25 m GTE35C2

4 x 25 m GTE35C4

Cut-to-size available (✂)

IMPORTANT

As colour might slightly vary
from batch to batch,
batches must not be mixed.

Sommer Flooring Ltd

22 Spitfire Close

Coventry – CV5 6UR

www.sommerltd.com

Tel : 024 7798 1711

E-mail : info@sommerltd.com

